

# LED Headlight Kit for Harley Davidson Road Glide

VST-010101-006



## BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.


## IMPORTANT

This headlight is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

## INSTALLATION INSTRUCTIONS


Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

1. Pictures of product and hardware  
Patch cord x2



YJ-QZHD-1857-01		1	M5X25		4
YJ-QZHD-1857-02		1	M5		8
			M5		4
M4X12		6	M5		4

2. First take out the two mounts in the accessory bag, fix them on the back shell of the headlight, for later use, as shown in the picture:

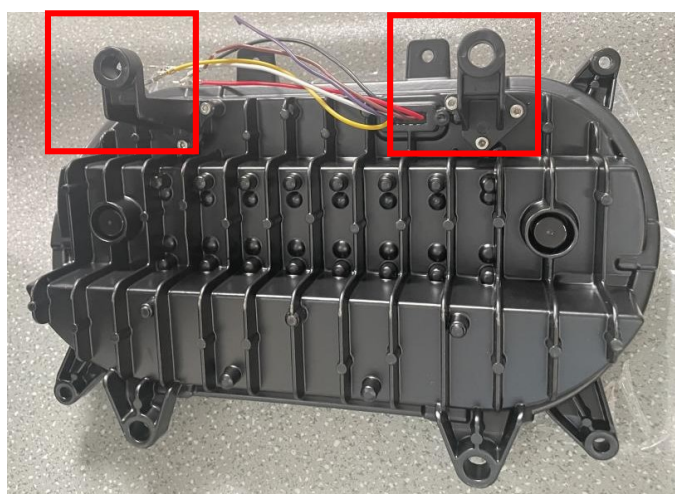

3. Remove the screws around windshield and the screws on the brackets of the turn signal lights on both sides, as shown in the picture.

# LED Headlight Kit for Harley Davidson Road Glide

VST-010101-006



4. Remove the speaker covers on both sides of the front and remove the screws inside the speaker, which hold the front protection cover. Remove the front instrument cover and unplug the wiring harness plug-in of the inside


turn signal light. As shown in picture:



5. Remove the screws that fixed the edge of the front protection cover, and remove the protection cover, as shown in the picture:

# LED Headlight Kit for Harley Davidson Road Glide

VST-010101-006

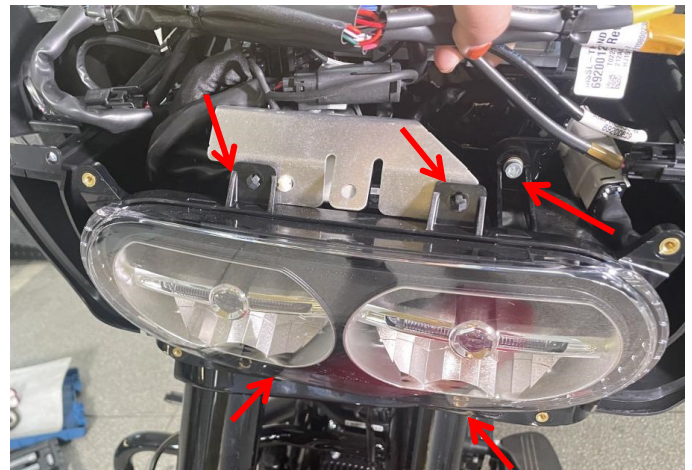

6. Remove the crescent-shaped decorative parts on the both sides of the original headlight, remove the screws that fixed the headlight, disconnect the plug-ins, remove the original headlight, the removed screws for later use. As shown in the picture:



7. Install the crescent-shaped decorative parts(removed just now) on the both sides of the new headlight, and install the headlight on the vehicle(don't tighten the screws)

Step A: Connect the wiring harness plug-ins of the headlight and vehicle, take out the two patch cords, connect the white extension cord on the patch cord with the purple or brown wire(one white extension cord to purple wire, another white extension cord to brown wire)on the headlight, for the two plug-ins on each patch cord, connect one end plug-in with the harness plug-in of turn signal on the headlight, connect another end plug-in of this patch cord with the harness plug-in of vehicle turn signal light, and start the vehicle, check whether the white extension cords were properly connected, if they are consistent with the left and right directions of the headlight steering function. If so, go to Step

# LED Headlight Kit for Harley Davidson Road Glide


VST-010101-006




C directly. If the steering function is opposite, go to Step B

Step B: If the turn signal function is opposite, connect the white extension wire plug-in with another side signal light of the vehicle, start the vehicle again to check whether the headlight turns in corresponding direction, and then proceed to Step C

Step C: After all steering harnesses are determined, insulate the joints of the harnesses, and then fix the headlights with screws . As shown in the picture.

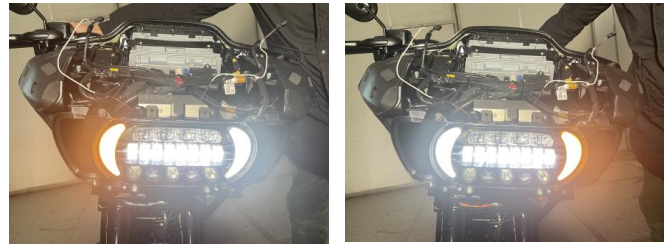

8. After the headlight is installed, install back the parts and screws removed before, as shown in the picture:

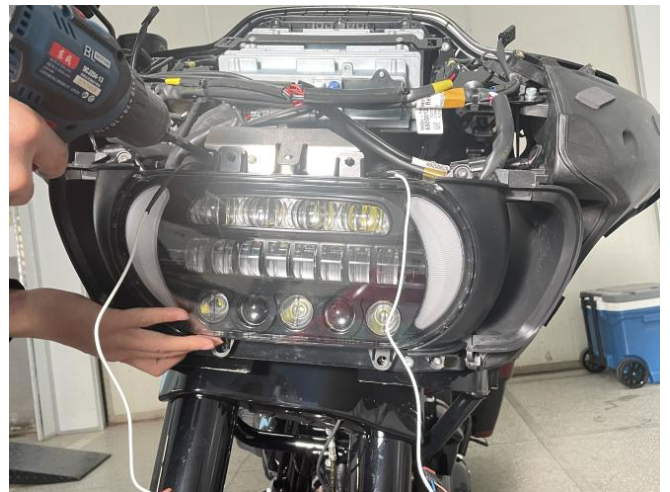

9. Installation finished.

