

LED Headlight with Halo Ring for Harley Davidson Motorcycle 2002-2016 V-Rod models

VST-010101-008



BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.


IMPORTANT

This LED HEADLIGHT KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.


1. First unscrew the 2 screws that fixed the headlight bracket and unplug the light plug, as shown in the picture:

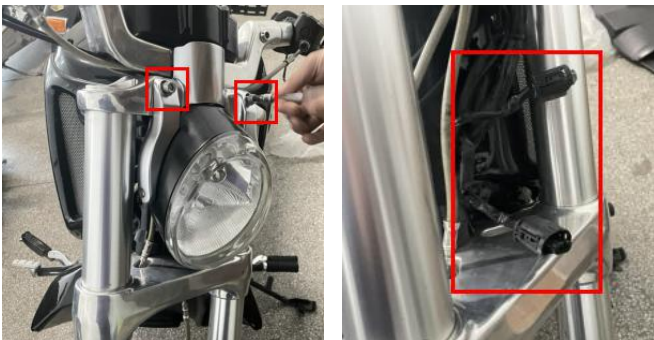

2. Unscrew the screws on both sides of the bracket which fixed the headlights, remove the original headlights, and take out the new headlights. First unscrew the screws on both sides of the new headlights for later use, install the light on the bracket, and then fix it with the screws that just removed, as shown in the picture:



3. Take out the white wire in the accessory package, peel off the skins of both ends of the wire, copper wire appears, connect one end to the aperture line on the light, completed the insulation protection, for later use, as shown in the picture:

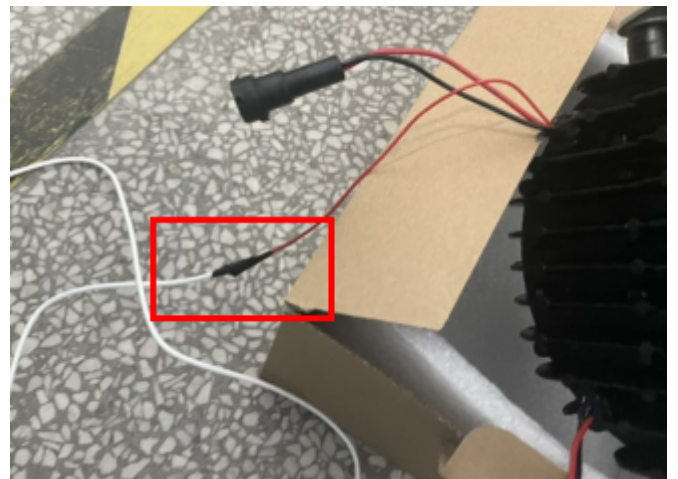

4. Before installing the headlights with the bracket to the vehicle, you need to connect the plugins of the high beam wiring harness and vehicle wiring harness.

Plugins on the vehicle are divided into high beam line (plugin have no limit) and low beam line (plugin have limit).

Step A: Connect the plugin of the low beam with the wiring harness of low beam wire on the vehicle, turn on the switch, and confirm whether the low beam light is on. If it is turned on, unplug the plug and go to step B; If it is not bright, you need to connect the light plugin with the vehicle wiring harness by the patch cord in the accessory package. Turn on the switch

LED Headlight with Halo Ring for Harley Davidson Motorcycle 2002-2016 V-Rod models

VST-010101-008




again to confirm whether the low beam light is on. If the light is on, unplug the plug and go to step B.

Step B: Connect the plugin of the high beam with the wiring harness of high beam wire on the vehicle, turn on the switch, and confirm whether the high beam light is on. If it is turned on, go to step C; If it is not bright, you need to connect the light plugin with the vehicle wiring harness by the patch cord in the accessory package. Turn on the switch again to confirm whether the high beam light is on. If the light is on, go to step C.

Step C: Connect the light plugin in Step A with the plugin of the vehicle wiring harness.

Note: THE LED light source is divided into positive and negative poles. If the positive and negative poles are connected in reverse, the light will be not bright, and fuse burning, fire and other dangers will occur.


After completing steps A,B and C, the headlight bracket can be fixed, as shown in the figure below:

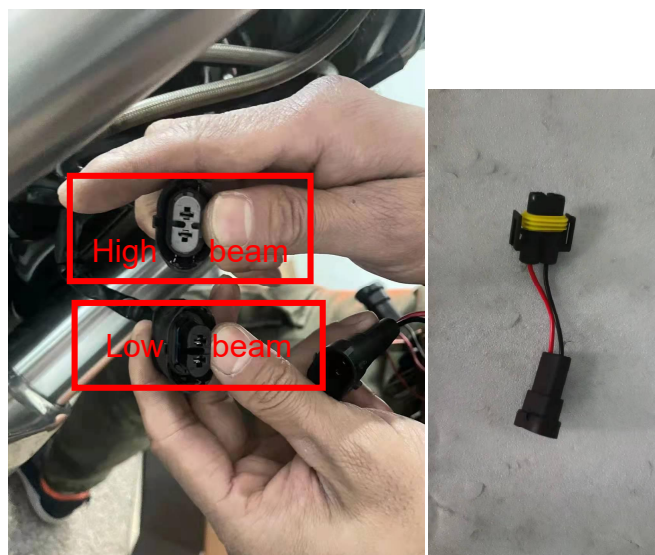

5. Open the seat cushion of the vehicle, find the ACC electrical box, take the white extension cord just connected to the aperture line of the headlight, pull it to the electrical box along the gap of the vehicle, connect well, and then install back the seat cushion, as shown in the picture:

LED Headlight with Halo Ring for Harley Davidson Motorcycle 2002-2016 V-Rod models

VST-010101-008

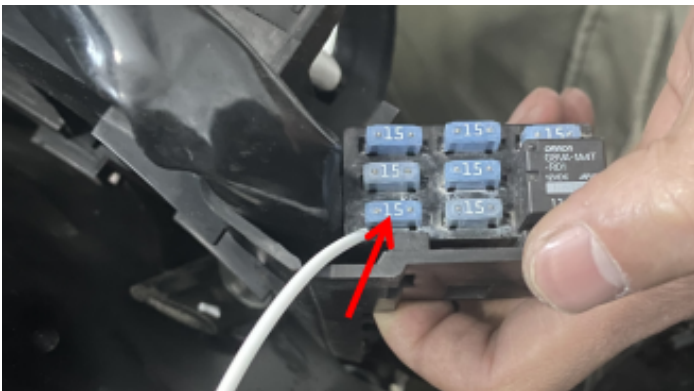

6. Installation finished.