

LED Headlight with Halo Ring for Road Glide Models

VST-010101-009



BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

This headlight is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

1. First remove the screws around the instrument panel and the screws around the turn signal light bracket on both sides of the vehicle, as shown in the picture




2. Remove the headlight protection cover, disconnect the wiring harness plug-ins of headlight, and remove the original headlight, as shown in the picture:



LED Headlight with Halo Ring for Road Glide Models



VST-010101-009

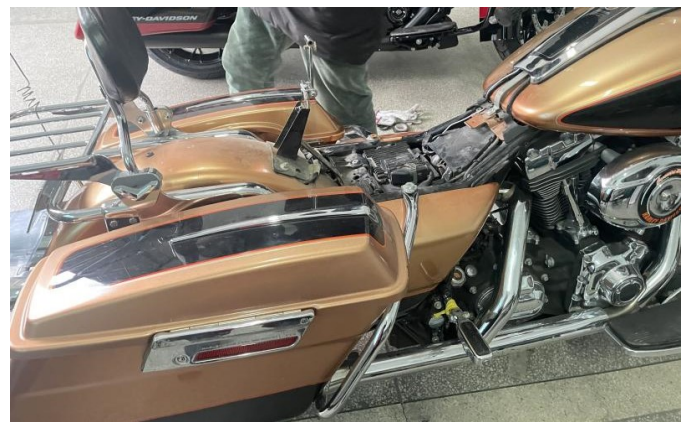

3. Reinstall the headlight protection cover on the body, as shown in the picture:

Note: During installation, the two inverted hooks on the vehicle body must be hooked to the protection cover, to avoid falling off.

5. Open the lid of the suitcase on one side, unscrew the two rings inside the box, take off the suitcase, and use a tool to pry open the heat insulation decorative board next, as shown in the picture:

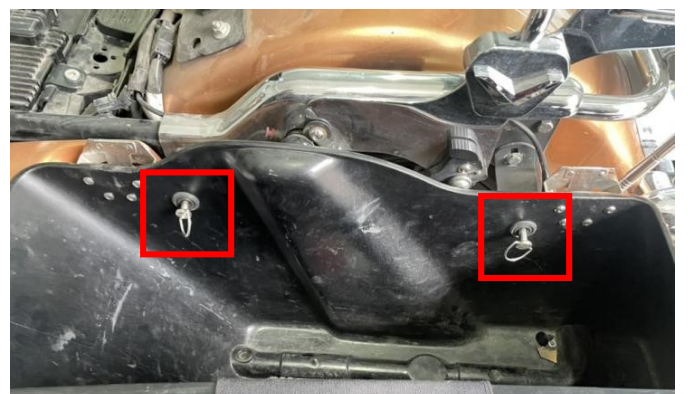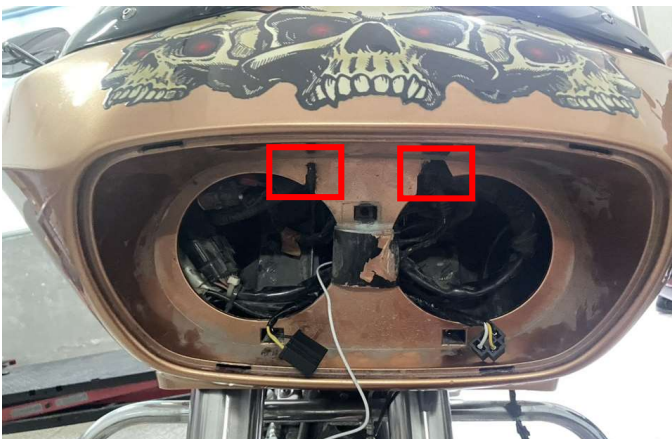

4. Remove the seat, as shown in the picture:




LED Headlight with Halo Ring for Road Glide Models

VST-010101-009





6. Find ACC electrical box, open the lid, use the white extension cord in the accessory bag, peel off the outer skin of one end of the wire, expose the copper wire, connect the electrical box, after connecting, pull it to the headlight place along the fuel tank, as shown in the figure:

7. For the ball screws inside the headlight ,fix them on the headlight frame by the fingerprint resistant plate(as the red arrow shown in the picture), adjust the approximate position of the white extension cord, which pulled over just now, according to the position of the headlight. Break the skin (don't cut) of the middle of the extension cord, expose copper wire, and connect it with the red wire of the headlight, start the vehicle at the same time, to check whether the light is on (shut down the power after normal lighting), do the insulation protection of the interface, connect the extra extension cord with the red aperture line on the other side,after connection of the wiring harness plug-ins of the headlight and vehicle, start the vehicle again, check whether the headlights and aperture work normally, and finally fix the headlights with screws. As shown in the picture:

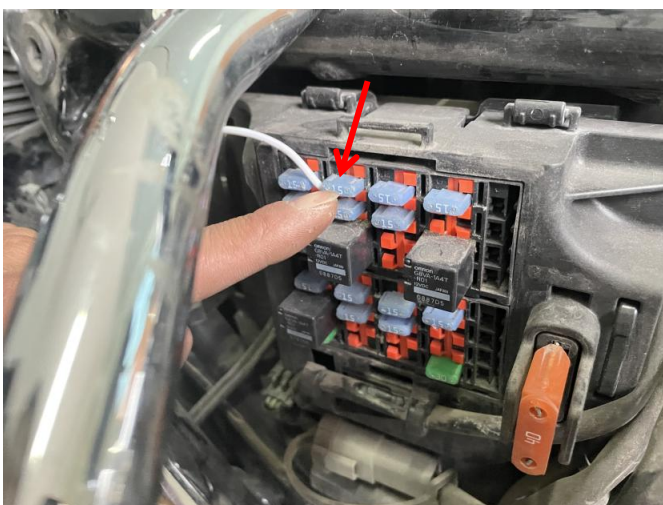

LED Headlight with Halo Ring for Road Glide Models

VST-010101-009

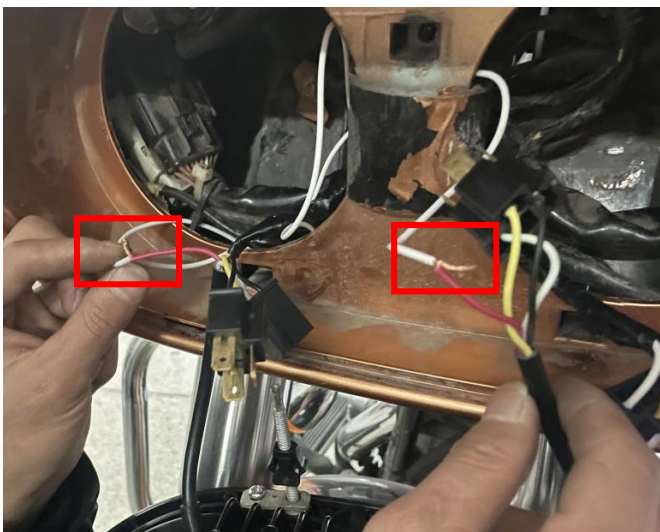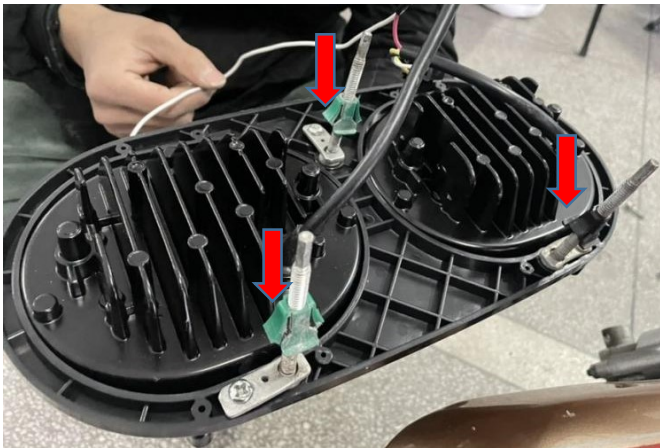

8. After the headlight is installed, clamp the eagle mouth cover (corresponding to the slot

during installation). Reinstall the parts removed before, as shown in the picture:



9. Installation finished.

