

# Headlight Fairing Cover For Harley Softail Breakout

VST-010103-011



## BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

## IMPORTANT


This HEADLIGHT FAIRING COVER KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

## INSTALLATION INSTRUCTIONS

1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.
2. Products and accessories.



3. Remove the screws securing the original headlights, unplug the headlight harness plug-in, and remove the headlights.

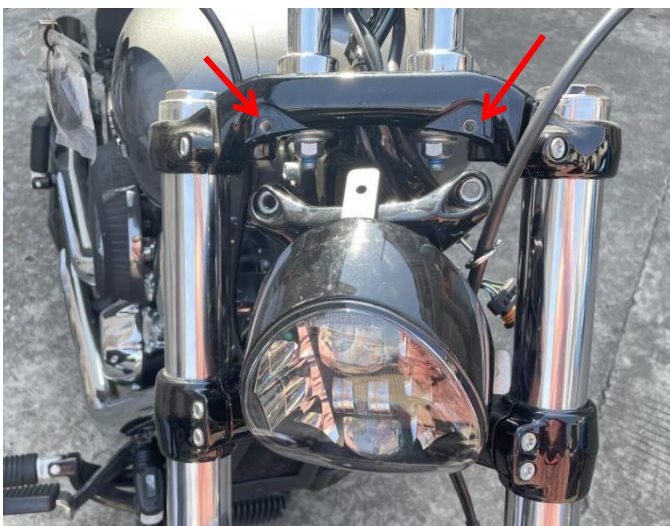


4. Remove the bracket on the back of the original headlight according to the steps in the picture, and replace it with a matching mounting bracket for the fairing.





# Headlight Fairing Cover For Harley Softail Breakout

VST-010103-011

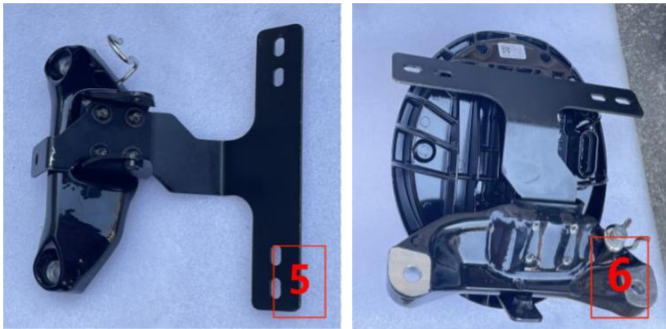

5. Install the headlight with the replacement bracket back on the vehicle again, and snap the fairing onto the headlight from the outside.

6. Take out the steel clips in the accessories bag, and clip them on both sides of the back of the fairing near the screw holes of the mounting brackets, and then tighten the steel clips through the brackets with screws to fix the fairing (the top of the fairing also needs screws), connect one end of the wire harness plug-in on the fairing to the wire harness plug-in on the original vehicle, and the other end plug-in to the headlight.





# Headlight Fairing Cover For Harley Softail Breakout

VST-010103-011



7. Installation completed.

