

# Radiator Cover for Harley Davidson Softail Breakout

VST-010103-015



## BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

## IMPORTANT

This Radiator Cover Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.



## INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

### 1. Kit Contents






2. Assemble the separate radiator covers together and connect the harness.

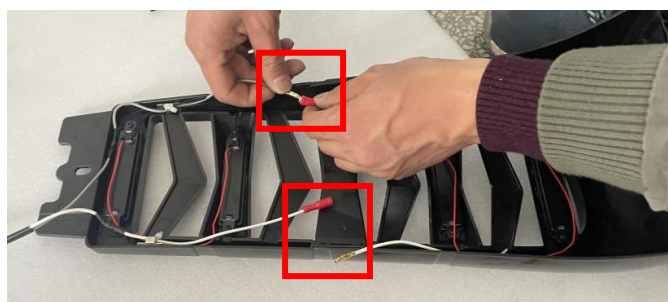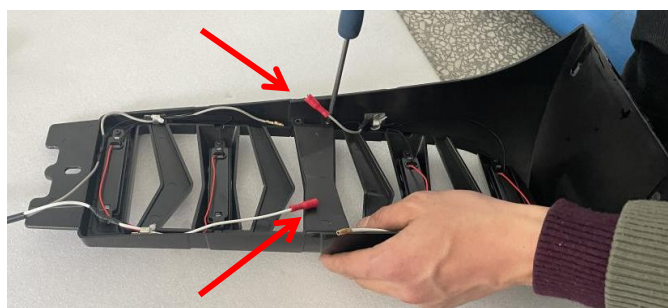

3. Unscrew the screws under the original radiator and install the bracket on both sides of the screws (the bracket is divided into the left and right sides). Then install the screws back in place and clamp a steel clip on the bracket on both sides.

# Radiator Cover for Harley Davidson Softail Breakout

VST-010103-015

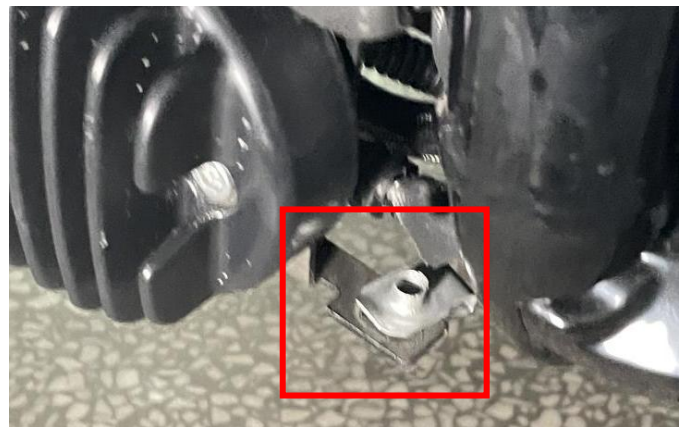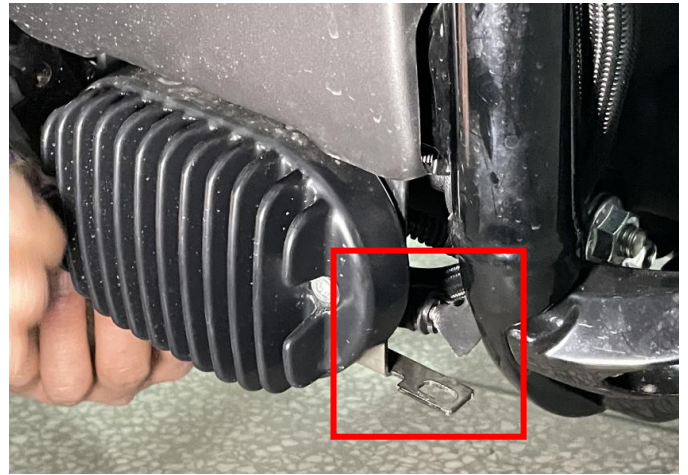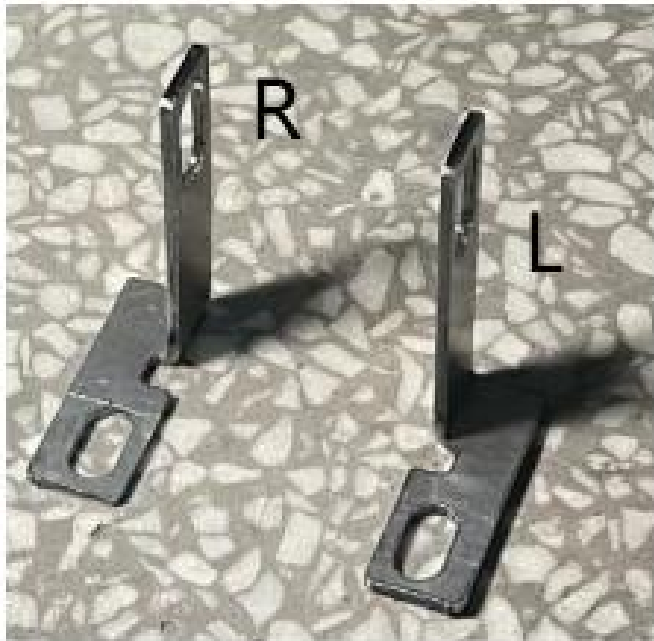

4. Fix the "L" bracket in the accessories package on the inner side of the beam bracket at the top of the original radiator (behind the arrow).






# Radiator Cover for Harley Davidson Softail Breakout

VST-010103-015



5. Fix the radiator cover on the newly installed bracket with screws. Then connect one end of the harness plug-in on the radiator cover to the harness plug-in of the original headlight and the other end to the integral harness plug-in.

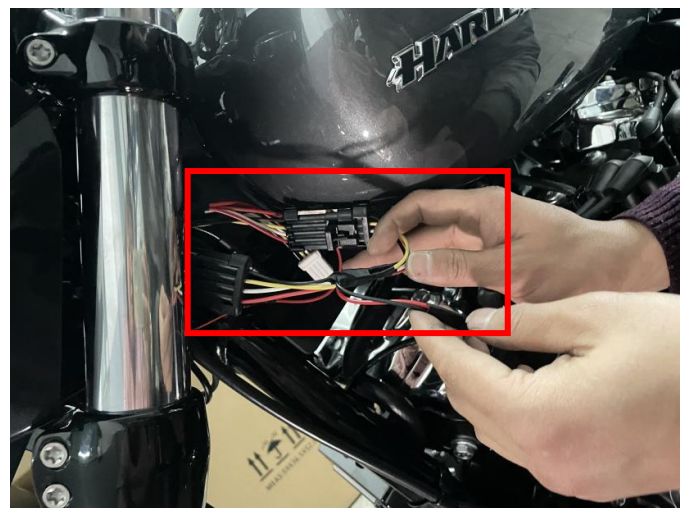

6. Installation finished.

# Radiator Cover for Harley Davidson Softail Breakout

VST-010103-015

