

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

This LED Auxiliary Light is exclusively designed for your motorcycle. Please read the installation instructions thoroughly before beginning. Installation is easier if the motorcycle is clean and free of debris.

INSTALLATION INSTRUCTIONS

Note: Shift motorcycle transmission into "PARK". Turn key to "OFF" position and remove from motorcycle.


1. Products Display



2. Fix the auxiliary light onto the mounting bracket of the original motorcycle front bumper using screws. The auxiliary lights are not divided into left and right, and only need to be installed symmetrically. As the picture shows:

Notice: Before installation, please check if your motorcycle has a bumper. If there is a bumper, please follow the steps to continue installation.

If there is no bumper, please install the bracket included in the package before installing the auxiliary light.

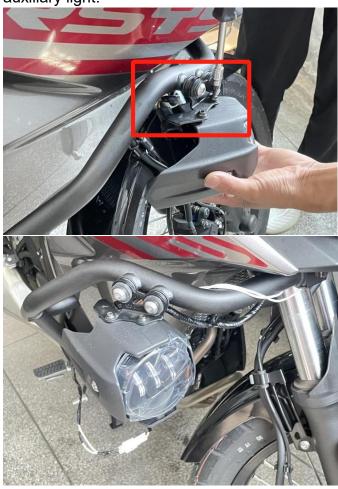

3. Remove the seat cushion, fix the control switch on the adapter wire in the package to the front handle of the motorcycle, and then pull the one extension wire of the white plug-in along the motorcycle harness to the auxiliary light and connect it to the auxiliary lights on both sides. The others extension cable is pulled to the motorcycle battery and connected (the red line is connected to the positive, and the

LED Auxiliary Light for Kawasaki Versys-X300

17-23

VST-010702-001



black line is connected to the negative. To avoid short circuits, the positive needs to be connected first and then the negative). Finally, hide exposed wiring harnesses and install back the seat cushions. As the picture shows:









4. Installation finished.





Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.